



TORNATECH

Project: _____

Customer: _____

Engineer: _____

Pump Manufacturer: _____

Technical Data
Submittal Document

GPx Series

Full Service
Electric Fire Pump Controller

Contents:

Data Sheets

Dimensional Data

Wiring Schematics

Field Connections


Note: The drawings included in this package are for controllers covered under our standard offering. Actual AS BUILT drawings may differ from what is shown in this package.




November 2025

Select starting method


Model GPA
Across the line

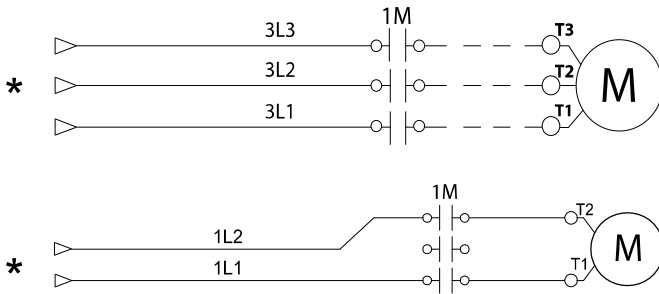


Model GPP
Partwinding

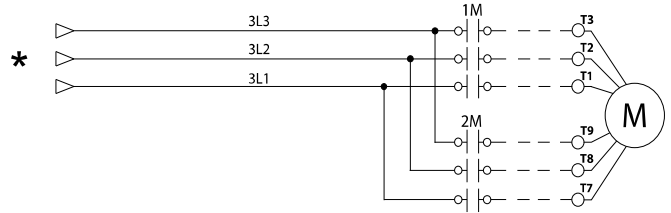


Model GPS
Soft Start Soft Stop

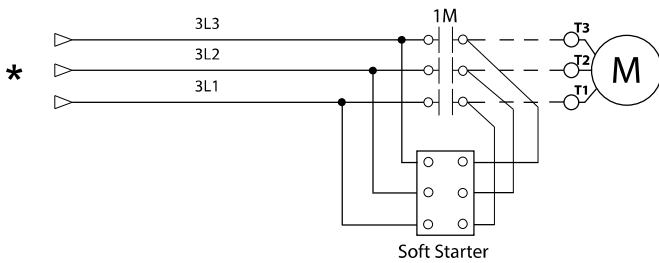


Model GPR
Autotransformer

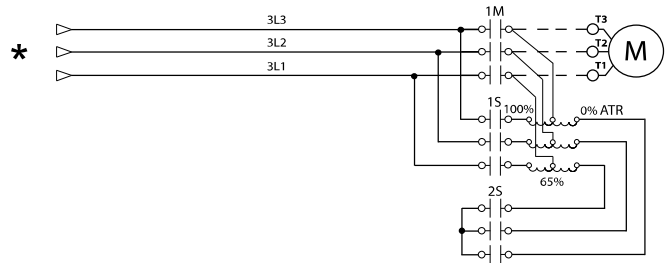

Model GPY
Wye-Delta Open

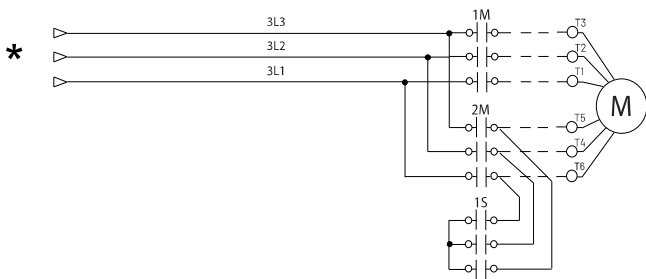

Model GPW
Wye-Delta Closed

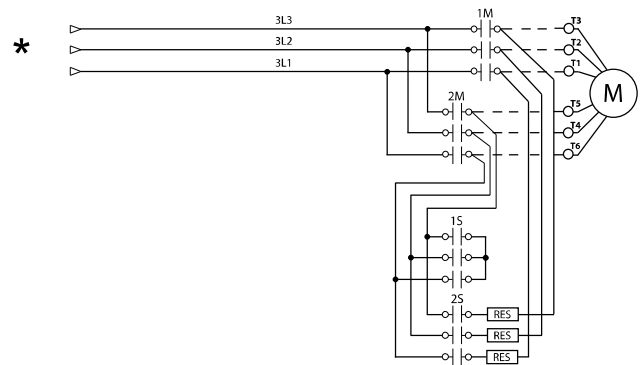

*From normal incoming power through Disconnecting Means (IS/CB)

*Please see Disconnecting Means details on page 4



Select voltage and power rating

Voltage	Select Voltage	HP	Select HP
120V/1ph/60Hz ¹	<input type="checkbox"/>	5	<input type="checkbox"/>
200V/1ph/60Hz ¹	<input type="checkbox"/>	7.5	<input type="checkbox"/>
208V/1ph/60Hz ¹	<input type="checkbox"/>	10	<input type="checkbox"/>
220V/1ph/60Hz ¹	<input type="checkbox"/>	15	<input type="checkbox"/>
230V/1ph/60Hz ¹	<input type="checkbox"/>	20	<input type="checkbox"/>
240V/1ph/60Hz ¹	<input type="checkbox"/>	25	<input type="checkbox"/>
200V/3ph/50-60Hz ³	<input type="checkbox"/>	30	<input type="checkbox"/>
208V/3ph/50-60Hz ³	<input type="checkbox"/>	40	<input type="checkbox"/>
220V/3ph/50-60Hz ⁴	<input type="checkbox"/>	50	<input type="checkbox"/>
230V/3ph/50-60Hz ⁴	<input type="checkbox"/>	60	<input type="checkbox"/>
240V/3ph/50-60Hz ⁴	<input type="checkbox"/>	75	<input type="checkbox"/>
380V/3ph/50-60Hz ⁵	<input type="checkbox"/>	100	<input type="checkbox"/>
400V/3ph/50-60Hz ⁵	<input type="checkbox"/>	125	<input type="checkbox"/>
415V/3ph/50-60Hz ⁵	<input type="checkbox"/>	150	<input type="checkbox"/>
440V/3ph/50-60Hz ⁶	<input type="checkbox"/>	200	<input type="checkbox"/>
460V/3ph/50-60Hz ⁶	<input type="checkbox"/>	250	<input type="checkbox"/>
480V/3ph/50-60Hz ⁶	<input type="checkbox"/>	300	<input type="checkbox"/>
575V/3ph/60Hz ⁶	<input type="checkbox"/>	350	<input type="checkbox"/>
600V/3ph/60Hz ⁶	<input type="checkbox"/>	400	<input type="checkbox"/>
		450	<input type="checkbox"/>
		500	<input type="checkbox"/>

Voltage	Select Voltage	kW ²	Select kW
380V/3ph/50-60Hz	<input type="checkbox"/>	4	<input type="checkbox"/>
400V/3ph/50-60Hz	<input type="checkbox"/>	5.5	<input type="checkbox"/>
415V/3ph/50-60Hz	<input type="checkbox"/>	7.5	<input type="checkbox"/>
		11	<input type="checkbox"/>
		15	<input type="checkbox"/>
		18.5	<input type="checkbox"/>
		22	<input type="checkbox"/>
		30	<input type="checkbox"/>
		37	<input type="checkbox"/>
		45	<input type="checkbox"/>
		55	<input type="checkbox"/>
		75	<input type="checkbox"/>
		90	<input type="checkbox"/>
		110	<input type="checkbox"/>
		132	<input type="checkbox"/>
		160	<input type="checkbox"/>
		200	<input type="checkbox"/>
		250	<input type="checkbox"/>
		315	<input type="checkbox"/>
		355	<input type="checkbox"/>
		400	<input type="checkbox"/>
		450	<input type="checkbox"/>

Notes: ¹ Only available for Model GPA. Maximum power rating is 30HP.

² kW power ratings only available for Models GPA, GPS and GPY.

³ Maximum power rating is 200HP.

⁴ Maximum power rating is 250HP.

⁵ Maximum power rating is 450HP.

⁶ Maximum power rating is 500HP.



Standard, Listings, Approvals and Certifications	Built to NFPA 20			
	Underwriters Laboratory (UL)	UL218 - Fire Pump Controllers		
	FM Global	Class 1321/1323		
	New York City	Accepted for use in the City of New York by the Department of Buildings		
	CE Mark	Various EN, IEC & CEE directives and standards		
	Built in Canada or U.A.E		Built in Europe	
	<input type="checkbox"/> CE Mark Option		Supplied as Standard	
Enclosure	Protection Rating			
	Built in Canada or U.A.E		Built in Europe	
	<input type="checkbox"/> Standard: NEMA 2		<input type="checkbox"/> Standard: IP55	
	Optional			
	<input type="checkbox"/> NEMA 12	<input type="checkbox"/> NEMA 4X-304 sst painted	<input type="checkbox"/> IP54	
	<input type="checkbox"/> NEMA 3	<input type="checkbox"/> NEMA 4X-304 sst brushed finish	<input type="checkbox"/> IP55	
	<input type="checkbox"/> NEMA 3R	<input type="checkbox"/> NEMA 4X-316 sst painted	<input type="checkbox"/> IP65	
	<input type="checkbox"/> NEMA 4	<input type="checkbox"/> NEMA 4X-316 sst brushed finish	<input type="checkbox"/> IP66	
	Accessories • Bottom entry gland plate • Lifting Lugs • Keylock handle		Paint Specifications • Red RAL3002 • Powder coating • Glossy textured finish	

Short Circuit Withstand Ratings															
HP	200V to 208V 50/60Hz/3ph			220V to 240V 50/60Hz/3ph			380V to 415V 50/60Hz/3ph			440V to 480V 50/60Hz/3ph			575V to 600V 60Hz/3ph		
	Standard	Inter-mediate	High	Standard	Inter-mediate	High	Standard	Inter-mediate	High	Standard	Inter-mediate	High	Standard	Inter-mediate	High
		Option D13 <input type="checkbox"/>	Option D13B <input type="checkbox"/>		Option D13 <input type="checkbox"/>	Option D13B <input type="checkbox"/>		Option D13 <input type="checkbox"/>	Option D13B <input type="checkbox"/>		Option D13 <input type="checkbox"/>	Option D13B <input type="checkbox"/>		Option D13 <input type="checkbox"/>	Option D13B <input type="checkbox"/>
≤150	100kA	150kA	200kA	100kA	150kA	200kA	100kA	150kA	200kA	100kA	150kA	200kA	50kA	100kA	-
200	50kA	100kA	-												
250	-	-	-	50kA	100kA	-									
300	-	-	-	-	-	-									
350	-	-	-	-	-	-									
400	-	-	-	-	-	-	50kA	100kA	-						
450	-	-	-	-	-	-	30kA	-	-	50kA	100kA	-			
500	-	-	-	-	-	-				-	-				



Ambient Temperature Rating	Standard: <input type="checkbox"/> 4°C to 40°C / 39°F to 104°F Optional: <input type="checkbox"/> 4°C to 55°C / 39°F to 131°F Controllers built in Dubai, UAE (Tornatech FZE) are supplied standard with 55°C rating.
Surge Suppression	Surge arrestor rated to suppress surges above line voltage
Disconnecting Means	<ul style="list-style-type: none"> • Isolating switch and circuit breaker assembly: <ul style="list-style-type: none"> - Door interlocked in the ON position - Isolating switch rated not less than 115% of motor full load current - Circuit breaker continuous rating not less than 115% of motor full load current - Overcurrent sensing non-thermal type, magnetic only - Instantaneous trip setting of not more than 20 times the motor full load current • Common flange mounted operating handle
Service Entrance Rating	Suitable as service entrance equipment (not applicable for installations in Canada).
Emergency Start Handle	<ul style="list-style-type: none"> • Flange mounted • Pull and latch activation • Integrated limit switch • Across the line start (direct on line)
Locked Rotor Protector	<ul style="list-style-type: none"> • Operate shunt trip to open circuit breaker • Factory set at 600% of motor full load current • Trip between 8 and 20 seconds
Electrical Readings	<ul style="list-style-type: none"> • Voltage phase to phase (normal power) • Amperage of each phase when motor is running
Pressure Readings	<ul style="list-style-type: none"> • Continuous system pressure display • Cut-in and Cut-out pressure settings
Pressure and Event recorder	<ul style="list-style-type: none"> • Pressure readings with date stamp • Event recording with date stamp • Under regular maintained operation, events are stored in memory for the life of the controller. • Data viewable on operator interface display screen • Downloadable by USB port to external memory device or wireless connection to manufacturers App (mobile device).
Pressure Sensing	<ul style="list-style-type: none"> • Pressure transducer and run test solenoid valve assembly for fresh water application • Pressure sensing line connection 1/2" Female NPT • Drain connection 3/8" • Rated for 0-500PSI working pressure (standard display at 0-300PSI) • Externally mounted with protective cover



Audible Alarm	Alarm buzzer - 85dB at 3 meters
Visual Indications	<ul style="list-style-type: none"> • Power available • Motor run • Periodic test • Manual start • Deluge valve start • Remote automatic start • Remote manual start • Emergency start • Pump on demand/Automatic start • Pump room temperature (°F or °C) • Lockout
Visual & Audible Alarms	<p>Visual</p> <ul style="list-style-type: none"> • Control voltage not healthy • Invalid cut-in • Lock rotor current • Loss of power • Low ambient temperature • Low water level • Motor trouble • Phase reversal (normal power) • Overcurrent • Overvoltage • Phase loss L1 • Phase loss L2 • Phase loss L3 • Phase unbalanced • Pressure transducer fault detected • Pump on demand • Pump room alarm • Service required • Undercurrent • Undervoltage • Check weekly test solenoid • Weekly test cut-in reached <p>Visual and audible</p> <ul style="list-style-type: none"> • Fail to start
Remote Alarm Contacts	<p>DPDT-8A-250V.AC</p> <ul style="list-style-type: none"> • Power available • Phase reversal • Motor run • Common pump room alarm (field re-assignable)** <ul style="list-style-type: none"> • Overvoltage • Undervoltage • Phase unbalance • Low pump room temperature • High Pump room temperature • Common motor trouble (field re-assignable)** <ul style="list-style-type: none"> • Overcurrent • Fail to start • Undercurrent • Ground fault • Free (field programmable)**

**Tornatech reserves the right to use any of these three alarm points for special specific application requirements.



ViZiTouch V2.1 Operator Interface	<ul style="list-style-type: none"> • Embedded microcomputer with software PLC logic • 7.0" color touch screen (HMI technology) • Upgradable software • Multi-language 			
Communication Protocol Capability	<ul style="list-style-type: none"> • Protocol: Modbus • Connection type: Shielded female connector RJ45 • Frame Format: TCP/IP • Addresses: See bulletin MOD-GPx 			
Operation	Automatic Start	<ul style="list-style-type: none"> • Start on pressure drop • Remote start signal from automatic device • Deluge valve start 		
	Manual Start	<ul style="list-style-type: none"> • Start pushbutton • Run test pushbutton • Remote start from manual device 		
	Stopping	<ul style="list-style-type: none"> • Manual with Stop pushbutton • Automatic after expiration of minimum run timer *** 		
	Timers	Field Adjustable & Visual Countdown	<ul style="list-style-type: none"> • Minimum run timer ***(off delay) • Sequential start timer (on delay) • Periodic test timer 	
	Actuation	Visual Indication	<ul style="list-style-type: none"> • Pressure • Non-pressure 	
	Mode		<ul style="list-style-type: none"> • Automatic • Non-automatic 	

***Can only be used if approved by the AHJ



<input type="checkbox"/>	A4	Flow switch provision
<input type="checkbox"/>	A8	Foam pump application w/o pressure transducer and run test solenoid valve.
<input type="checkbox"/>	A9	Low zone pump control function
<input type="checkbox"/>	A10	Middle zone pump control function
<input type="checkbox"/>	A11	High zone pump control function
<input type="checkbox"/>	A13	Non-pressure actuated controller w/o pressure transducer and run test solenoid valve
<input type="checkbox"/>	A16	Lockout/interlock circuit from equipment installed inside the pump room
<input type="checkbox"/>	B11	Built in alarm panel (120V.AC supervisory power) providing indication for: • Audible alarm & silence pushbutton for motor run, phase reversal, loss of phase. • Pilot lights for loss of phase & supervisory power available
<input type="checkbox"/>	B11B	Built in alarm panel same as B11 but 220-240VAC supervisory power
<input type="checkbox"/>	B19A	High motor temperature c/w thermostat relay and alarm contacts (DPDT)
<input type="checkbox"/>	B19B	High motor temperature c/w PT100 relay and alarm contacts (DPDT)
<input type="checkbox"/>	B21	Ground fault alarm detection c/w visual indication and alarm contact (DPDT)
<input type="checkbox"/>	B25	Digital flow test feature complete with access to Pump Curve menu, display of flow rate on main screen and 25ft cable (Option ONLY suitable for connection with Tornatech digital flow meter)
<input type="checkbox"/>	C1	Extra motor run alarm contact (DPDT)
<input type="checkbox"/>	C4	Periodic test alarm contact (DPDT)
<input type="checkbox"/>	C6	Low discharge pressure alarm contact (DPDT)
<input type="checkbox"/>	C7	Low pump room temperature alarm contact (DPDT)
<input type="checkbox"/>	C10	Low water reservoir level alarm contact (DPDT)
<input type="checkbox"/>	C11	High electric motor temperature alarm contact (DPDT)
<input type="checkbox"/>	C12	High electric motor vibration c/w visual indication and alarm contact (DPDT)
<input type="checkbox"/>	C14	Pump on demand / automatic start alarm contact (DPDT)
<input type="checkbox"/>	C15	Pump fail to start alarm contact (DPDT)
<input type="checkbox"/>	C16	Control voltage healthy alarm contact (DPDT)

<input type="checkbox"/>	C17	Flow meter valve loop open c/w visual indication and alarm contact (DPDT)
<input type="checkbox"/>	C18	High water reservoir level c/w visual indication and alarm contact (DPDT)
<input type="checkbox"/>	C19	Emergency start alarm contact (DPDT)
<input type="checkbox"/>	C20	Manual start alarm contact (DPDT)
<input type="checkbox"/>	C21	Deluge valve start alarm contact (DPDT)
<input type="checkbox"/>	C22	Remote automatic start alarm contact (DPDT)
<input type="checkbox"/>	C23	Remote manual start alarm contact (DPDT)
<input type="checkbox"/>	C24	High pump room temperature alarm contact (DPDT)
<input type="checkbox"/>	C25	Second set of standard alarm contacts (DPDT) (Typical for city of Los Angeles and Denver)
<input type="checkbox"/>	Cx	Additional visual and alarm contact (Specify function) (DPDT)
<input type="checkbox"/>	D1	Low suction pressure transducer for fresh water rated at 0-500PSI with visual indication and alarm contact
<input type="checkbox"/>	D1A	Low suction pressure transducer for sea water rated at 0-500PSI with visual indication and alarm contact
<input type="checkbox"/>	D5	Pressure transducer and run test solenoid valve for fresh water rated for 0-500PSI (for factory calibration purposes only)
<input type="checkbox"/>	D5D	Pressure transducer and run test solenoid valve for sea water rated for 0-500PSI
<input type="checkbox"/>	D10	Omit mounting feet (when applicable)
<input type="checkbox"/>	D14	Anti-condensation heater & thermostat
<input type="checkbox"/>	D14A	Anti-condensation heater & humidistat
<input type="checkbox"/>	D14B	Anti-condensation heater & thermostat & humidistat
<input type="checkbox"/>	D15	Tropicalization
<input type="checkbox"/>	D18	CE Mark with factory certificate
<input type="checkbox"/>	D27	Motor heater connection (external single phase power source and heater on/off contact)
<input type="checkbox"/>	D27A	Motor heater connection (internal single phase power source and heater on/off contact)
<input type="checkbox"/>	D28	Customized drawing set

*For fire pump controller section only.

Note: Options chosen from this page are not electrically represented on the wiring schematics in this submittal package.




<input type="checkbox"/>	D34A	Field programmable I/O board - 5 Input / 5 output
<input type="checkbox"/>	D36	Redundant pressure transducer for fresh water rated for 0-500PSI
<input type="checkbox"/>	D36A	Redundant pressure transducer for sea water rated for 0-500PSI
<input type="checkbox"/>	D43	Seismic Certification compliant to CBC 2019, IBC 2018 rigid base/wall mounted only
<input type="checkbox"/>	D44	Special Seismic Certification compliant to OSHPD rigid base/wall mounted only

<input type="checkbox"/>	L01	Other language and English (bilingual)
<input type="checkbox"/>	L02	French
<input type="checkbox"/>	L03	Spanish
<input type="checkbox"/>	L04	German
<input type="checkbox"/>	L05	Italian
<input type="checkbox"/>	L06	Polish
<input type="checkbox"/>	L07	Romanian
<input type="checkbox"/>	L08	Hungarian
<input type="checkbox"/>	L09	Slovakian
<input type="checkbox"/>	L10	Croatian
<input type="checkbox"/>	L11	Czech
<input type="checkbox"/>	L12	Portuguese
<input type="checkbox"/>	L13	Dutch
<input type="checkbox"/>	L15	Turkish
<input type="checkbox"/>	L16	Swedish
<input type="checkbox"/>	L21	Danish
<input type="checkbox"/>	L25	Chinese
<input type="checkbox"/>	L28	Finnish
<input type="checkbox"/>	L29	Norwegian

Additional Options:

Note: Options chosen from this page are not electrically represented on the wiring schematics in this submittal package.

ViZiTouch V2.1 Operator Interface

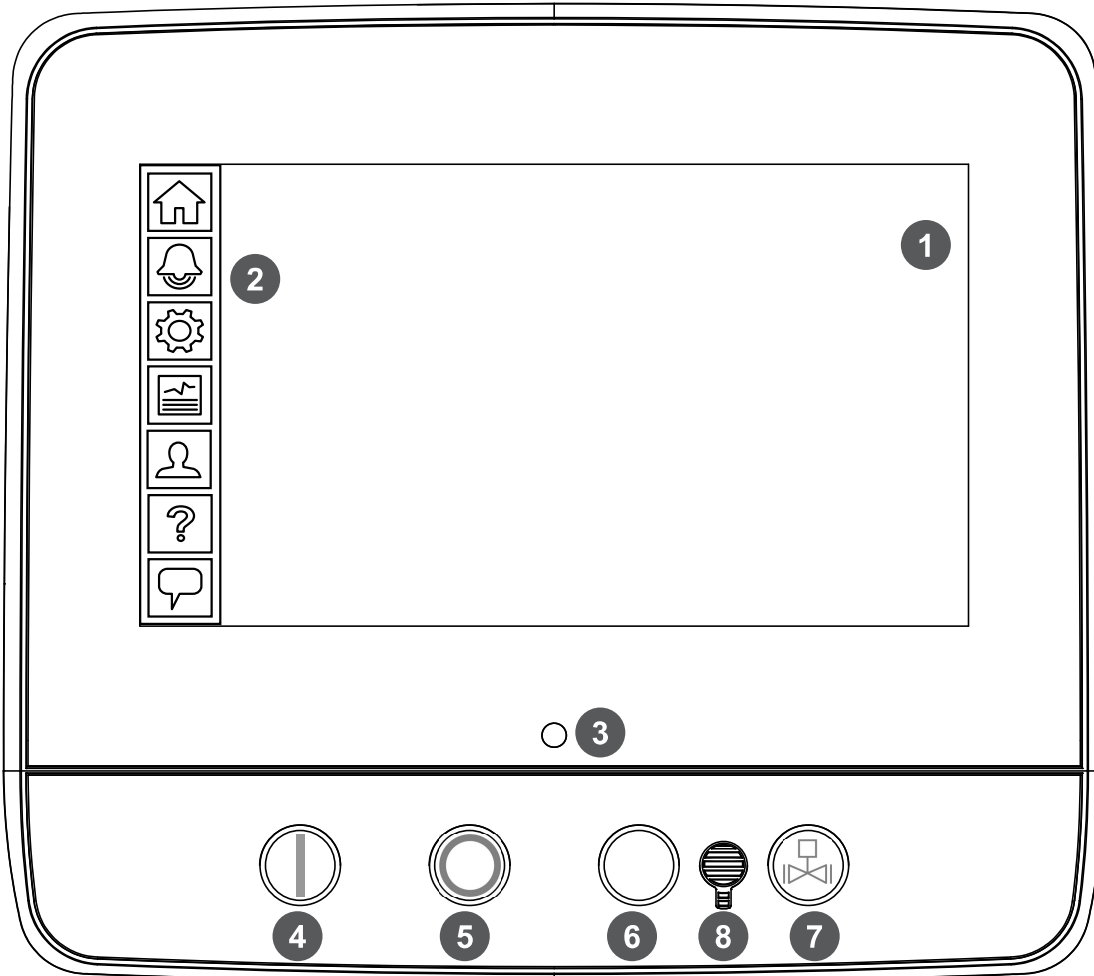

- | | |
|------------------------|--------------------------|
| 1 - Color touch screen | 3 - Power LED (3 colors) |
| 2 - Onscreen menu | 4 - START button |
| • HOME page | 5 - STOP button |
| • ALARM page | 6 - Not Used |
| • CONFIGURATION page | 7 - RUN TEST button |
| • HISTORY page | 8 - Alarm buzzer |
| • SERVICE page | |
| • MANUAL page | |
| • LANGUAGES page | |



© Tornatech, Inc. Not for construction.
Subject to change without notice.

TORNATECH

BY	DD/MM/YY
DRAWN BY	ACD
FINAL APPROVAL	FC
	11/01/24
	11/01/24


ELECTRIC FIRE PUMP CONTROLLER REDUCED VOLTAGE / SOFT STARTER

MODEL:GPS



BUILT TO THE LATEST EDITION OF THE NFPA20 & NFPA70



DRAWING NUMBER
GPS-WS800/E
DWG REV. 1
SHEET 1 OF 2

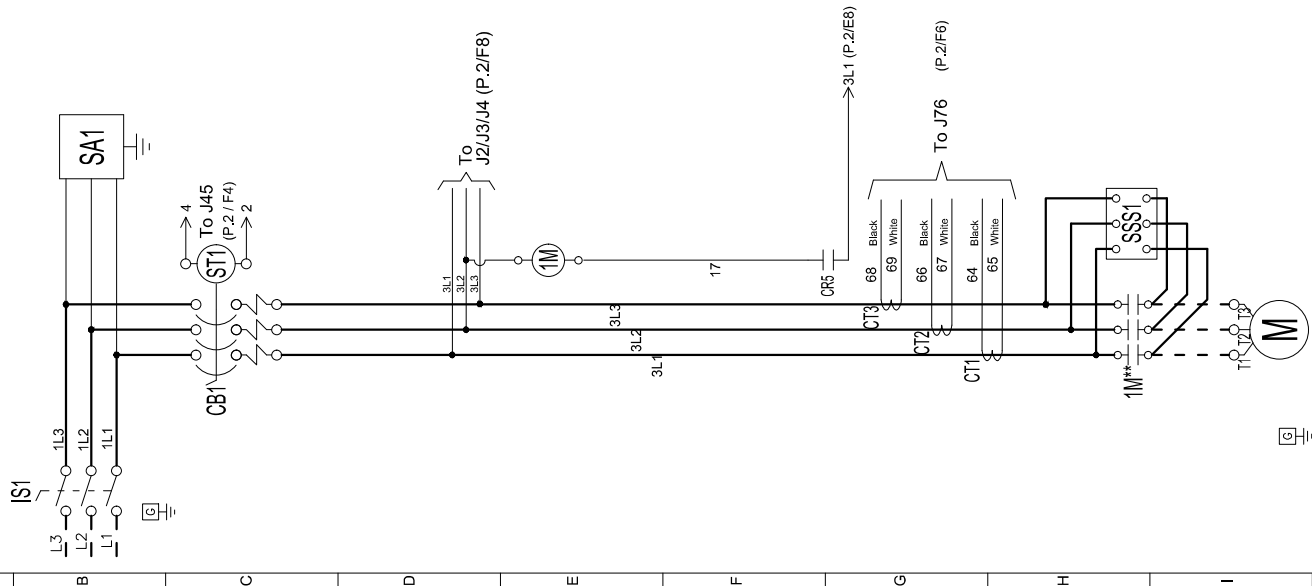

To I/O
Electric Board
UP
(P.2/E2)

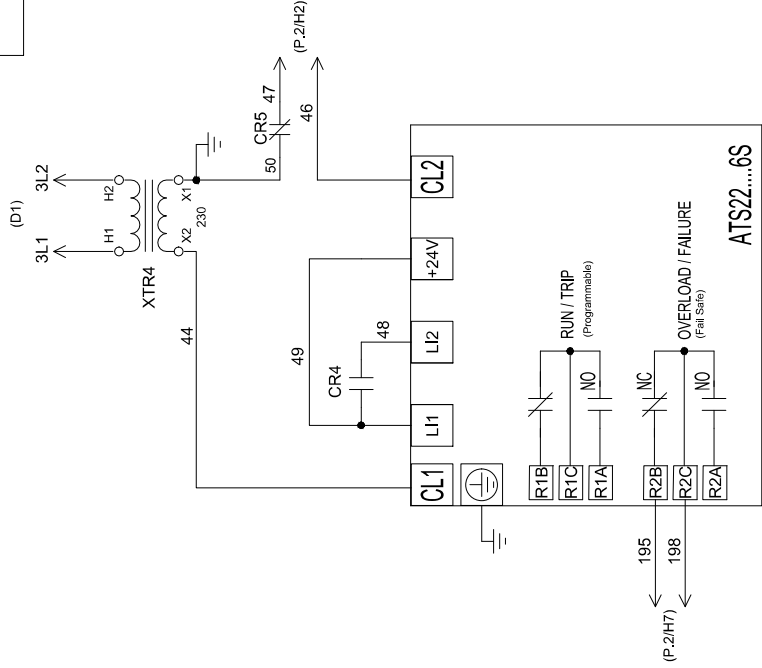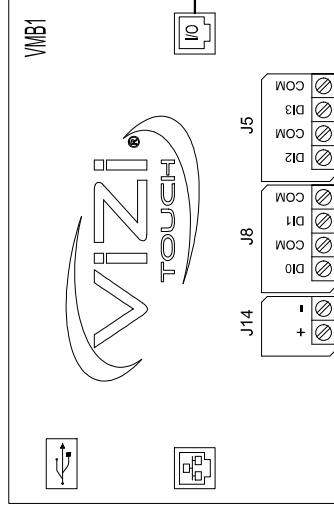

Legend	
1M	Contactor
AB	Alarm Bell
CB	Circuit Breaker
CR	Circuit Relay
CT	Current Transformer
EB	Electric IO Board
IS	Isolating Switch
J	Jumper
LS	Limit Switch
PT	Pressure Transducer
SA	Surge Arrester
SSS	Soft Starter
ST	Shunt Trip
SV	Solenoid Valve
VMB	Main Board
XTR	Transformer



© Tornatech, Inc. Not for construction.
Subject to change without notice.

BY	DD/MM/YY
DRAWN BY	MLC
FINAL APPROVAL	FC

ELECTRIC FIRE PUMP CONTROLLER

MODEL: GPX

BUILT TO THE LATEST EDITION OF THE NFPA20 & NFPA70





DRAWING NUMBER
GPX-TD907/E
DWG REV. 0
SHEET 1 OF 1

COPPER CONDUCTORS for Isolating Switch (IS1).

Field Wiring According to Bending Space (AWG or MCM). Terminals L1 - L2 - L3

Bending Space	5" (127 mm)						8" (203 mm)			10" (254 mm)		
	7.5	10	15	20	25	30	40	50	60	40	50	60
HP Voltage												
208	1x (10 to 10)	1x (8 to 10)	1x (6 to 10)	1x (4 to 10)	1x (3 to 10)	1x (2 to 10)	1x (10 to 30)	1x (30 to 250)	1x (40 to 250)	1x (10 to 30)	1x (30 to 250)	1x (40 to 250)
220 to 240	1x (10 to 10)	1x (8 to 10)	1x (6 to 10)	1x (4 to 10)	1x (3 to 10)	1x (2 to 10)	1x (1 to 30)	1x (20 to 30)	1x (30 to 250)	1x (1 to 30)	1x (3 to 10)	1x (1 to 10)
380 to 416	1x (10 to 10)	1x (10 to 10)	1x (8 to 10)	1x (8 to 10)	1x (6 to 10)	1x (6 to 10)	1x (4 to 10)	1x (3 to 10)	1x (3 to 10)	1x (4 to 10)	1x (4 to 10)	1x (3 to 10)
440 to 480	1x (10 to 10)	1x (10 to 10)	1x (10 to 10)	1x (8 to 10)	1x (8 to 10)	1x (6 to 10)	1x (6 to 10)	1x (4 to 10)	1x (4 to 10)	1x (6 to 10)	1x (4 to 10)	1x (3 to 10)
600	1x (10 to 10)	1x (10 to 10)	1x (10 to 10)	1x (10 to 10)	1x (8 to 10)	1x (8 to 10)	1x (6 to 10)	1x (6 to 10)	1x (4 to 10)	1x (6 to 10)	1x (6 to 10)	1x (4 to 10)
Bending Space	12" (305 mm)											
HP Voltage												
208	2x (10 to 500)	2x (40 to 500)	2x (250 to 500)	3x (40 to 500)	3x (250 to 500)	3x (250 to 500)	3x (250 to 500)	3x (250 to 500)	3x (250 to 500)	3x (250 to 500)	3x (250 to 500)	3x (250 to 500)
220 to 240	1x (250)	2x (30 to 500)	2x (40 to 500)	2x (350 to 500)	3x (250 to 500)	3x (250 to 500)	2x (350 to 500)	2x (350 to 500)	2x (350 to 500)	2x (350 to 500)	2x (350 to 500)	2x (350 to 500)
380 to 416	1x (10 to 250)	1x (30 to 250)	1x (250)	1x (500)	2x (40 to 500)	2x (300 to 500)	1x (300 to 500)	1x (250 to 500)	1x (250 to 500)	3x (40 to 500)	2x (250 to 500)	4x (30 to 500)
440 to 480	1x (1 to 250)	1x (20 to 250)	1x (40 to 250)	1x (350 to 500)	1x (500)	2x (40 to 500)	1x (500)	2x (300 to 500)	3x (40 to 500)	2x (300 to 500)	3x (30 to 500)	3x (250 to 500)
600	1x (3 to 10)	1x (20 to 250)	1x (30 to 250)	1x (250 to 500)	1x (350 to 500)	1x (500)	1x (500)	2x (40 to 500)	2x (250 to 500)	2x (40 to 500)	2x (300 to 500)	2x (350 to 500)
Bending Space	5" (127 mm)											



***Only for 16" (406 mm) bending space

ALUMINUM CONDUCTORS for Isolating Switch (IS1).***

Field Wiring According to Bending Space (AWG or MCM). Terminals L1 - L2 - L3

Bending Space	5" (127 mm)						8" (203 mm)			10" (254 mm)		
	7.5	10	15	20	25	30	40	50	60	40	50	60
HP Voltage												
208	1x (10 to 10)	1x (6 to 10)	1x (4 to 10)	1x (3 to 10)	1x (1 to 10)	1x (10)	1x (30)	1x (40 to 250)	1x (300)* or 1x (250) 90°C*	1x (10 to 30)	1x (30 to 250)	1x (40 to 250)
220 to 240	1x (10 to 10)	1x (6 to 10)	1x (4 to 10)	1x (3 to 10)	1x (2 to 10)	1x (1 to 10)	1x (20 to 30)	1x (30) 90°C*	1x (250)	1x (10 to 30)	1x (30 to 250)	1x (40 to 250)
380 to 416	1x (10 to 10)	1x (10 to 10)	1x (6 to 10)	1x (6 to 10)	1x (4 to 10)	1x (4 to 10)	1x (2 to 10)	1x (1 to 10)	1x (10)	1x (4 to 10)	1x (1 to 10)	1x (1 to 10)
440 to 480	1x (10 to 10)	1x (10 to 10)	1x (8 to 10)	1x (6 to 10)	1x (6 to 10)	1x (6 to 10)	1x (4 to 10)	1x (4 to 10)	1x (1 to 10)	1x (6 to 10)	1x (4 to 10)	1x (2 to 10)
600	1x (10 to 10)	1x (10 to 10)	1x (10 to 10)	1x (8 to 10)	1x (6 to 10)	1x (6 to 10)	1x (6 to 10)	1x (6 to 10)	1x (4 to 10)	1x (6 to 10)	1x (4 to 10)	1x (2 to 10)
Bending Space	12" (305 mm)											
HP Voltage												
208	2x (40 to 500)	2x (300 to 500)	2x (350 to 500)	3x (300 to 500)	3x (400 to 500)	3x (400 to 500)	3x (300 to 500)	3x (300 to 500)	3x (300 to 500)	3x (300 to 500)	3x (300 to 500)	3x (300 to 500)
220 to 240	1x (350)**	2x (250 to 500)	2x (300 to 500)	2x (500)	3x (400 to 500)	3x (400 to 500)	2x (500)	2x (500)	2x (500)	2x (500)	2x (500)	2x (500)
380 to 416	1x (250)	Consult Factory	1x (500)	Consult Factory	2x (300 to 500)	2x (500)	Consult Factory	2x (300 to 500)	3x (350 to 500)	3x (300 to 500)	3x (400 to 500)	3x (400 to 500)
440 to 480	1x (10 to 250)	1x (30 to 250)	1x (250)	1x (500)	Consult Factory	2x (300 to 500)	1x (500)	Consult Factory	2x (400 to 500)	2x (250 to 500)	3x (300 to 500)	3x (350 to 500)
600	1x (1 to 10)	1x (40 to 250)	1x (40 to 250)	1x (350 to 500)	1x (500)	Consult Factory	1x (500)	Consult Factory	2x (350 to 500)	2x (300 to 500)	2x (400 to 500)	2x (500)
Bending Space	8" (203 mm)											

- Notes:
- 1 - For proper wire sizing, refer to NFPA70 and NEC (USA) or CEC (Canada) or local code.
 - 2 - Controller suitable for use as service equipment in USA.
 - 3 - Controller use as service equipment prohibited in Canada.
 - 4 - For more accurate motor connections refer to motor manufacturer or motor nameplate.
 - 5 - Controller is phase sensitive. Incoming lines must be connected in ABC sequence.

* For standard enclosure, use 90°C aluminum wire. Consult Factory for Use of Conductors Rated Lower than 90°C.
** Consult Factory
*** Aluminum is not permitted in Canada.

Drawing for information only.
Manufacturer reserves the right to modify this drawing without notice.
Contact manufacturer for "As Built" drawing.



© Tornatech, Inc. Not for construction.
Subject to change without notice.

BY DD/MM/YY
DRAWN BY MLC 04/10/24
FINAL APPROVAL FC 07/11/24

ELECTRIC FIRE PUMP CONTROLLER

MODEL: GPR/GPS

BUILT TO THE LATEST EDITION OF THE NFPA20 & NFPA70



DRAWING NUMBER
GPX-TD903/E

DWG REV. 0
SHEET 1 OF 1

COPPER CONDUCTORS for Motor Connection (1M).

Field Wiring According to Bending Space (AWG or MCM). Terminals T1 - T2 - T3

HP	7.5	10	15	20	25	30	350	400	450	500
Voltage										
208	1x (10 to 2)	1x (8 to 2)	1x (6 to 2)	1x (4 to 2)	1x (3 to 2/0)	1x (2 to 2/0)	1x (1/0 to 3/0)	1x (3/0)	1x (4/0 to 300)	
220 to 240	1x (10 to 2)	1x (10 to 2)	1x (8 to 2)	1x (4 to 2)	1x (4 to 2/0)	1x (3 to 2/0)	1x (1 to 3/0)	1x (2/0 to 3/0)	1x (3/0)	
380 to 416	1x (10 to 2/0)	1x (10 to 2/0)	1x (8 to 2/0)	1x (8 to 2/0)	1x (6 to 2/0)	1x (6 to 2/0)	1x (4 to 2/0)	1x (3 to 2/0)	1x (1 to 2/0)	
440 to 480	1x (10 to 2/0)	1x (10 to 2/0)	1x (10 to 2/0)	1x (8 to 2/0)	1x (8 to 2/0)	1x (6 to 2/0)	1x (6 to 2/0)	1x (4 to 2/0)	1x (3 to 2/0)	
600	1x (10 to 2/0)	1x (10 to 2/0)	1x (10 to 2/0)	1x (10 to 2/0)	1x (8 to 2/0)	1x (8 to 2/0)	1x (6 to 2/0)	1x (6 to 2/0)	1x (4 to 2/0)	
HP										
Voltage										
208	1x (300)	2x (2/0 to 300)	2x (250 to 300)	2x (400 to 600)	-----	-----	-----	-----	-----	-----
220 to 240	1x (250 to 300)	2x (2/0 to 300)	2x (4/0 to 300)	2x (350 to 500)	2x (500 to 600)	-----	-----	-----	-----	-----
380 to 416	1x (1/0 to 3/0)	1x (3/0)	1x (250 to 300)	2x (3/0 to 300)	2x (4/0 to 300)	2x (300 to 600)	2x (400 to 600)	2x (500 to 600)	2x (600)	-----
440 to 480	1x (1 to 2/0)	1x (2/0 to 3/0)	1x (3/0 to 300)	2x (1/0 to 300)	2x (3/0 to 300)	2x (4/0 to 600)	2x (300 to 600)	2x (350 to 600)	2x (400 to 600)	2x (500 to 600)
600	1x (3 to 2/0)	1x (1 to 3/0)	1x (2/0 to 300)	1x (3/0 to 300)	2x (2/0 to 300)	2x (3/0 to 300)	2x (4/0 to 600)	2x (250 to 600)	2x (300 to 600)	2x (350 to 600)

ALUMINUM CONDUCTORS for Contactor (1M).***

Field Wiring According to Bending Space (AWG or MCM). Terminals T1 - T2 - T3


HP	7.5	10	15	20	25	30	350	400	450	500
Voltage										
208	1x (10 to 2/0)**	1x (6 to 2/0)**	1x (4 to 2/0)**	1x (3 to 2/0)**	1x (1 to 2/0)**	1x (1/0 to 2/0)**	1x (2/0) 90°C*	Consult Factory	1x (300)	
220 to 240	1x (10 to 2/0)**	1x (10 to 2/0)**	1x (8 to 2/0)**	1x (3 to 2/0)**	1x (2 to 2/0)**	1x (1 to 2/0)**	1x (2/0)	1x (3/0) 90°C*	Consult Factory	
380 to 416	1x (12 to 2/0)**	1x (12 to 2/0)**	1x (10 to 2/0)**	1x (6 to 2/0)**	1x (4 to 2/0)**	1x (4 to 2/0)**	1x (2 to 2/0)**	1x (1 to 2/0)**	1x (1/0 to 2/0)	
440 to 480	1x (12 to 2/0)**	1x (12 to 2/0)**	1x (10 to 2/0)**	1x (8 to 2/0)**	1x (6 to 2/0)**	1x (6 to 2/0)**	1x (4 to 2/0)**	1x (2 to 2/0)**	1x (1 to 2/0)	
600	1x (12 to 2/0)**	1x (12 to 2/0)**	1x (12 to 2/0)**	1x (8 to 2/0)**	1x (8 to 2/0)**	1x (8 to 2/0)**	1x (4 to 2/0)**	1x (4 to 2/0)**	1x (2 to 2/0)	
HP										
Voltage										
208	1x (300) 90°C*	2x (4/0 to 300)	2x (300) 90°C*	2x (600)	-----	-----	-----	-----	-----	-----
220 to 240	1x (300) 90°C*	2x (3/0 to 300)	2x (250 to 300)	2x (500)	2x (600)	-----	-----	-----	-----	-----
380 to 416	1x (3/0)	Consult Factory	1x (300) 90°C*	Consult Factory	2x (300)	2x (500 to 600)	2x (600)	2x (600) 90°C*	2x (600) 90°C*	-----
440 to 480	1x (1/0 to 2/0)	1x (3/0)	1x (250 to 300)	2x (3/0 to 300)	2x (250 to 300)	2x (300 to 600)	2x (400 to 600)	2x (500 to 600)	2x (600)	2x (600) 90°C*
600	1x (1 to 2/0)	1x (2/0 to 3/0)	1x (4/0 to 300)	1x (4/0 to 300)	2x (3/0 to 300)	2x (4/0 to 300)	2x (300 to 600)	2x (350 to 600)	2x (400 to 600)	2x (500 to 600)

* For standard enclosure, use 90°C aluminium wire. Consult Factory for Use of Conductors Rated Lower than 90°C.

** Option V659 required.

*** Aluminum is not permitted in Canada.

Motor Terminals



Models: GPR/GPS

- Notes:**
- 1 - For proper wire sizing, refer to NFPA70 and NEC (USA) or CEC (Canada) or local code.
 - 2 - Controller suitable for use as service equipment in USA.
 - 3 - Controller use as service equipment prohibited in Canada.
 - 4 - For more accurate motor connections refer to motor manufacturer or motor nameplate.
 - 5 - Controller is phase sensitive. Incoming lines must be connected in ABC sequence.

Drawing for information only.
Manufacturer reserves the right to modify this drawing without notice.
Contact manufacturer for "As Built" drawing.



© Tornatech, Inc. Not for construction. Subject to change without notice.

BY	DD/MM/YY
DRAWN BY	ACD
FINAL APPROVAL	FC

ELECTRIC FIRE PUMP CONTROLLER

MODEL: GPX

BUILT TO THE LATEST EDITION OF THE NFPA20 & NFPA70




UL Listed
NEMA Approved

DRAWING NUMBER
GPX-TD803/E
DWG REV. 0
SHEET 1 OF 1

Field Connections

Terminals Wire Size:
24 - 12 AWG
0.5 Nm

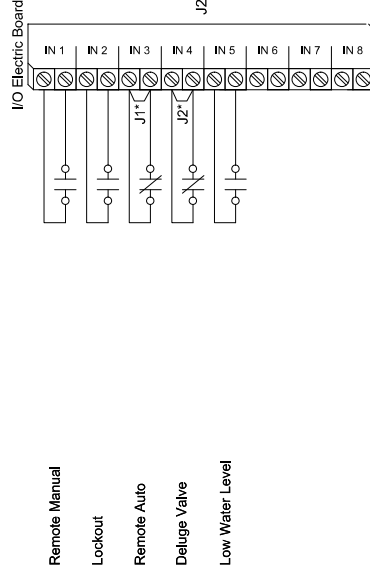

Network Connections

Terminals Wire Size:
Shielded Female Connector RJ45


Located on Main Board



Modbus TCP/IP RJ45

Alarm Contacts

Terminals Wire Size:
24 - 12 AWG
0.5 Nm

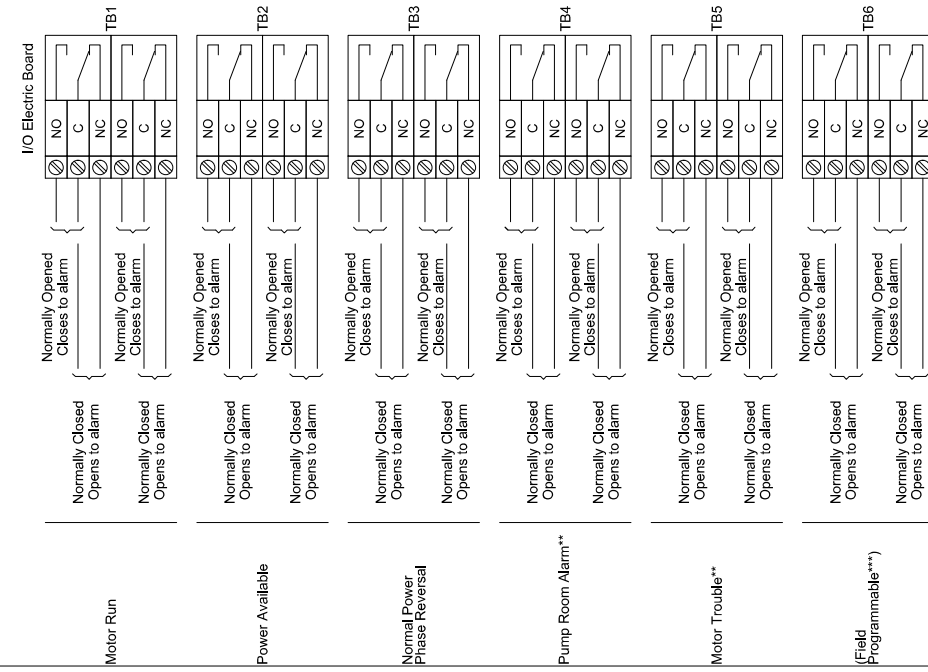

* Remove jumper to use this feature
** Re-assignable
*** Not available on GPS models



TORNATECH

© Tornatech, Inc. Not for construction.
Subject to change without notice.

BY	DD/MM/YY
DRAWN BY	ACD
FINAL APPROVAL	FC


21/11/24
21/11/24

MODEL: GPA/GPR/GPS


**ELECTRIC FIRE PUMP CONTROLLER
MOTOR CONNECTIONS**

DRAWING NUMBER
GPX-MC001/E
DWG REV. 2
SHEET 1 OF 1


**IMPORTANT : - NFPA 20-2022 Art. 9.5.3.2 :
A MOTOR TERMINAL CONNECTING DIAGRAM FOR MULTIPLE LEAD
MOTORS SHALL BE FURNISHED BY THE MOTOR MANUFACTURER.**

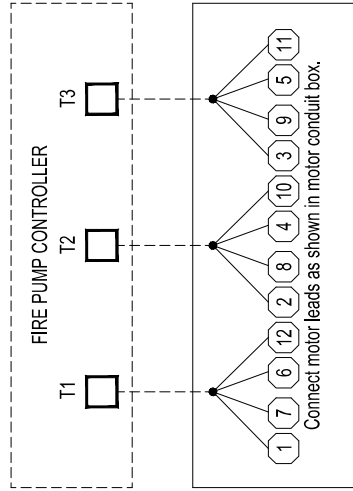

12 LEADS MOTOR
FOR DUAL VOLTAGE MOTOR
OPERATING ON THE LOWER
OF THE TWO VOLTAGES

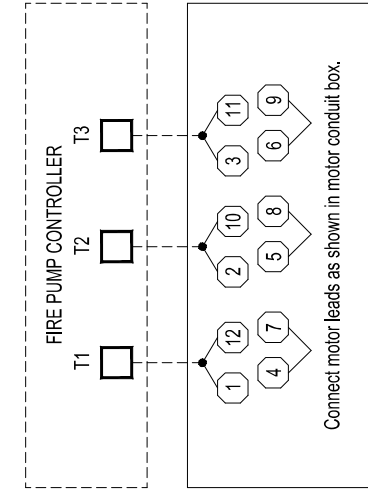

12 LEADS MOTOR
FOR DUAL VOLTAGE MOTOR
OPERATING ON THE HIGHER
OF THE TWO VOLTAGES

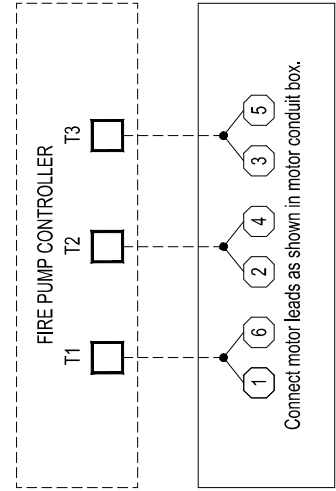

6 LEADS MOTOR
FOR DELTA CONNECTION

**Tornatech Inc. ASSUMES NO
LIABILITY FOR INCORRECT WIRING
OF THE MOTOR TO THE
CONTROLLER**

- WARNING :**
- THIS DRAWING IS FOR GENERAL INFORMATION.
 - CONSULT MOTOR MANUFACTURER BEFORE CONNECTING TO CONTROLLER.
 - CONNECT MOTOR LEADS AS SHOWN IN MOTOR CONDUIT BOX