


MODELO:
* IA2½H

NOTA:
EL MANGUITO (5), SE INSTALA
APLICÁNDOLE CALOR, ANTES DE
PRESENTARLO EN LA FLECHA
DEL MOTOR.

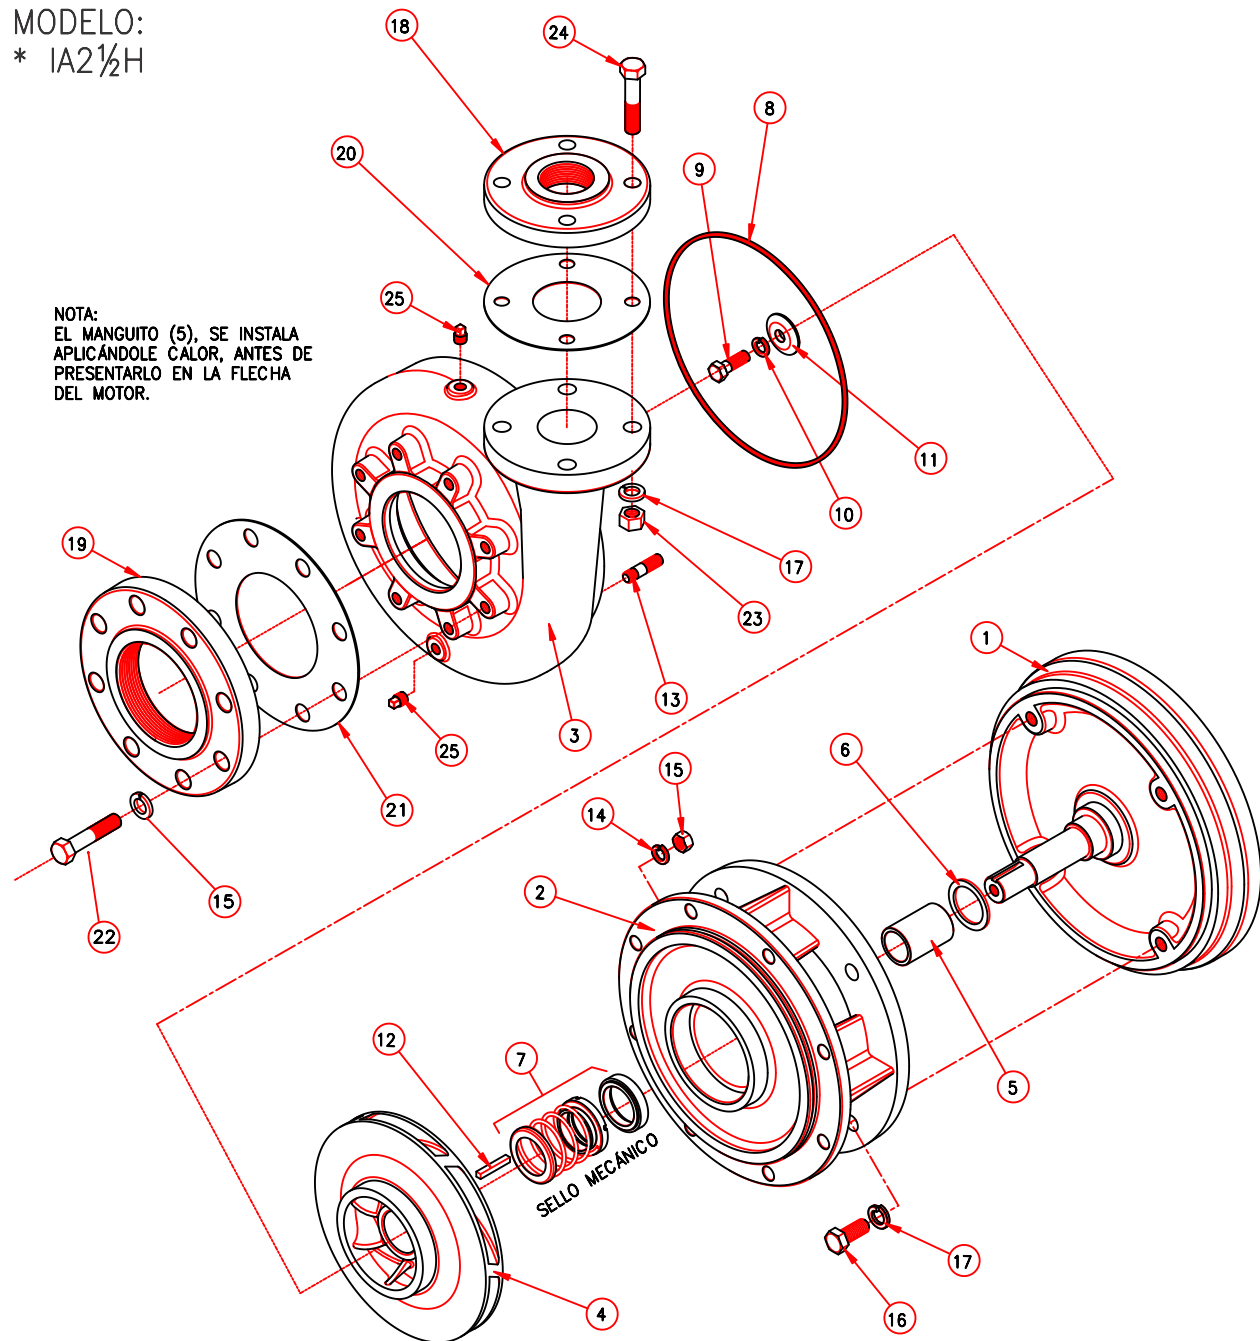

► IA2½H

Ítem	Kit de sello	Código	Descripción	Cant.
1		40020032	40 HP, 3500 RPM, 3F, arm. 324/6 JM	1
		40020034	50 HP, 3500 RPM, 3F, arm. 324/6 JM	
		40020036	60 HP, 3500 RPM, 3F, arm. 364/5 JM	
		40020038	75 HP, 3500 RPM, 3F, arm. 364/5 JM	
		40020040	100 HP, 3500 RPM, 3F, arm. 405 TCZ	
2		03010065	Acoplamiento intermedio	1
3		03090094	Voluta	1
4		03140142	Impulsor - 40 HP - Ø7.875"	1
		03140142B	Impulsor - 50 HP - Ø8.464"	
		03140142C	Impulsor - 60 HP - Ø9.055"	
		03140142D	Impulsor - 75 HP - Ø9.842"	
		03140142E	Impulsor - 100 HP - Ø10.197"	
5	★	30400838	Manguito	1
6	★	92010016	Arandela deflectora	1
7	★	31030411	Sello mecánico	1
8	★	92010090	Empaque O-ring	1
9		91010351	Tornillo hex. 1/2" x 1 1/2" inox.	1
10		91010062	Arandela de presión 1/2" inox.	1
11		30400416	Arandela de impulsor	1
12		30400633	Cuña 1/4"	1
13		91010310	Tornillo prisionero 1/2" x 2"	8
14		91010014	Arandela de presión 1/2"	8
15		91010415	Tuerca hex. 1/2"	8
16		91010282	Tornillo hex. 5/8" x 1 1/2"	4
17		91010015	Arandela de presión 5/8"	16
18		03060013	Brida de descarga 2 1/2"	1
19		03060006	Brida de succión 4"	1
20		92010175	Empaque para brida 2 1/2"	1
21		92010156	Empaque para brida 4"	1
22		91010285	Tornillo hex. 5/8" x 3"	4
23		91010416	Tuerca hex. 5/8"	12
24		91010283	Tornillo hex. 5/8" x 2"	8
25		93010143	Tapón macho 1/4" NPT	2